


NOTES

- 1. Material & Finishing  
 Body: Stainless Steel TYPE 303, Passivate  
 Insulators: PTFE  
 Center Conductor : Beryllium Copper Gold Plating
- 2. Electrical Data:  
 Impedance: 50 Ohms  
 Frequency: DC~67GHz  
 VSWR 1.35Max.  
 Withstanding Voltage: 100 Vrms
- 3. Mechanical Data  
 Durability: 500 Cycle Min.
- 4. Environment Data  
 Temperature Range: -40~+125 Deg.C  
 All materials are RoHS compliance

REVISIONS			
LTR	DESCRIPTION	DATE	DCN NO.
A	RELEASE TO MFG.	8/14/05	050814001

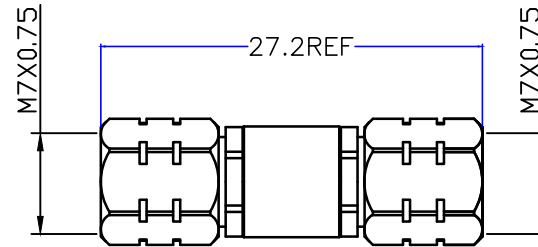

**CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

<p><u>PROPRIETARY NOTICE</u></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN PERMISSION OF RFCONNECTOR.COM.CN</p>	<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES</p> <p>DECIMAL            ANGULAR          .X ± .1                ±          .XX ± .05</p> <p>DO NOT SCALE DRAWING</p>	DRAWN		TITLE:	1.85mm Male to Male Adapter	
		CHECKED				
		ENGINEERING		DRAWING NO. ADA-18-MM-67	REV.	A01
		MANUFACTURING			SCALE: 4:1	WIGHT(gr):
		QUALITY				