


NOTES

- 1.Material & Finishing
Body: Stainless Steel TYPE 303, Passivate
Insulators: PTFE
Center Conductor : Beryllium Copper Gold Plating
- 2.Electrical Data:
Impedance: 50 Ohms
Frequency: DC~50GHz
VSWR 1.35Max.
Withstanding Voltage: 100 Vrms
- 3.Mechanical Data
Durability: 500 Cycle Min.
- 4.Environment Data
Temperature Range: -40-+125 Deg.C
All materials are RoHS compliance

REVISIONS

LTR	DESCRIPTION	DATE	DCN NO.
A	RELEASE TO MFG.	09/14/05	050914001

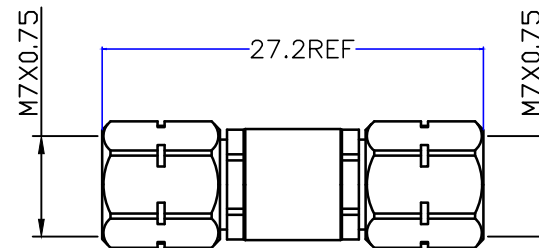

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

PROPRIETARY NOTICE

THE INFORMATION CONTAINED
IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR
DISCLOSED WITHOUT THE PRIOR
WRITTEN PERMISSION OF
RFCONNECTOR.COM.CN

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN METRIC
TOLERANCES

DECIMAL ANGULAR
.X ± .1 ±
.XX ± .05
DO NOT SCALE DRAWING

DRAWIN

CHECKED

ENGINEERING

MANUFACTURING

QUALITY

TITLE:

2.4mm Male to Male
Adapter

DRAWING NO. ADA-24-MM-50

SCALE: 4:1

WIGHT(gr):

RFCONNECTOR
WWW.RFCONNECTOR.COM.CN
射频连接器

REV.

A01

SHEET OF