


NOTES


- 1. Material & Finishing
 - Body: Stainless Steel TYPE 303, Passivate
 - Insulators: PTFE
 - Center Conductor : Beryllium Copper Gold Plating
- 2. Electrical Data:
 - Impedance: 50 Ohms
 - Frequency: DC~40GHz
 - VSWR 1.30Max.
 - Withstanding Voltage: 100 Vrms
- 3. Mechanical Data
 - Durability: 500 Cycle Min.
- 4. Environment Data
 - Temperature Range: -40~+125 Deg.C
 - All materials are RoHS compliance

| REVISIONS | | | |
|-----------|-----------------|----------|-----------|
| LTR | DESCRIPTION | DATE | DCN NO. |
| A | RELEASE TO MFG. | 10/12/05 | 051012001 |

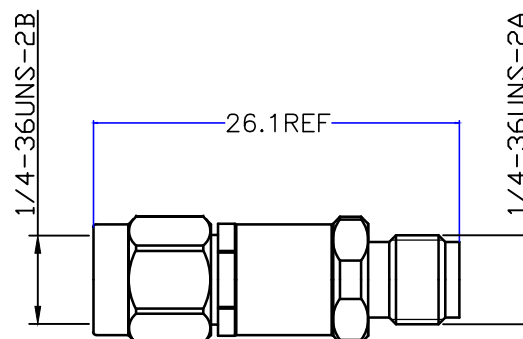

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

| | | | | | | |
|--|--|---------------|--|--------------------------|-------------------------------|---|
| <p><u>PROPRIETARY NOTICE</u></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN PERMISSION OF RFCONNECTOR.COM.CN</p> | <p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES</p> <p>DECIMAL ANGULAR</p> <p>.X ± .1 ±</p> <p>.XX ± .05</p> <p>DO NOT SCALE DRAWING</p> | DRAWN | | TITLE: | 2.92mm Male to Female Adapter |  |
| | | CHECKED | | | | |
| | | ENGINEERING | | DRAWING NO. ADA-29-MF-40 | REV. | A01 |
| | | MANUFACTURING | | | SCALE: 4:1 | WIGHT(gr): |
| | | QUALITY | | | | |