


NOTES

- 1. Material & Finishing  
 Body: Stainless Steel TYPE 303, Passivate  
 Insulators: PTFE  
 Center Conductor : Beryllium Copper Gold Plating
- 2. Electrical Data:  
 Impedance: 50 Ohms  
 Frequency: DC~33GHz  
 VSWR 1.30Max.  
 Withstanding Voltage: 100 Vrms
- 3. Mechanical Data  
 Durability: 500 Cycle Min.
- 4. Environment Data  
 Temperature Range: -40~+125 Deg.C  
 All materials are RoHS compliance

REVISIONS			
LTR	DESCRIPTION	DATE	DCN NO.
A	RELEASE TO MFG.	10/18/05	051018001

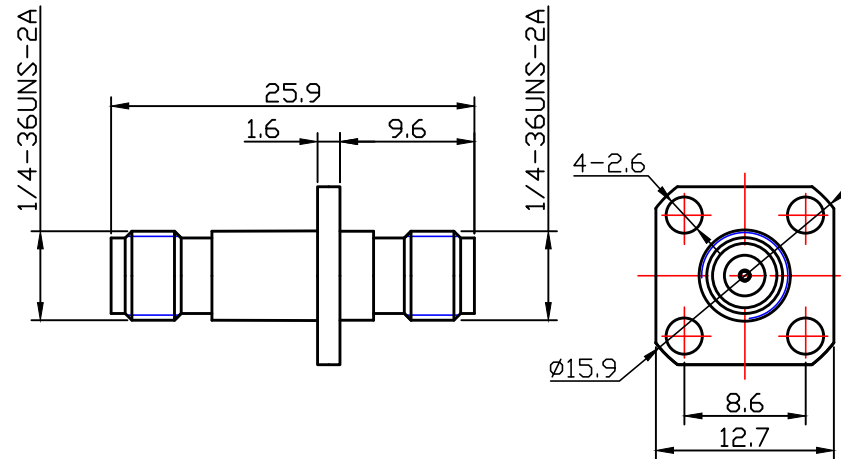

**CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

<p><u>PROPRIETARY NOTICE</u>          THE INFORMATION CONTAINED          IN THIS DRAWING IS PROPRIETARY          AND SHALL NOT BE USED OR          DISCLOSED WITHOUT THE PRIOR          WRITTEN PERMISSION OF          RFCONNECTOR.COM.CN</p>	<p>UNLESS OTHERWISE SPECIFIED          DIMENSIONS ARE IN METRIC          TOLERANCES</p> <p>DECIMAL            ANGULAR          .X ± .1                ±          .XX ± .05</p> <p>DO NOT SCALE DRAWING</p>	DRAWN		<p>TITLE:          4 Hole Flange Mount          3.5mm Female to Female          Adapter</p>	<p>RFCONNECTOR          WWW.RFCONNECTOR.COM.CN          射频连接器</p>
		CHECKED			
		ENGINEERING			
		MANUFACTURING		DRAWING NO. ADA-35-FFHF-33	REV.            A01
		QUALITY		SCALE: 4:1	WIGHT(gr):